


Wall Outlet for the FTTH subscriber connection at network level 5




- > Pre-assembled 4 port wall outlet for the fiber optic connection at the customer's premise (network level 5)
- > Stable and appealing housing made of white polycarbonate
- > Pre-assembled with 4 SC/APC or LC/APC ports and pigtails, according to the DIN color code and stored in the splice trays
- > Hinged splice tray with molded splice protection holder for crimp and heat shrink
- > Patch access secured with spring-loaded protection hood and marked with a laser warning label
- > Versatile cable entries for all installation cases, from all sides as well as from the rear
- > Integrated cable strain relief via clamping segments for up to 5 mm diameter
- > Integrated management for fibers and wires
- > Cover with save locking and high dust protection level
- > Integration option of reflector elements, also inline for remote service
- > On request, the FTTH-WO-4F can be pre-assembled with the appropriate installation cable to avoid splicing at the customer's premise


Configurations meeting the requirements of the subsidized German fiber rollout available:

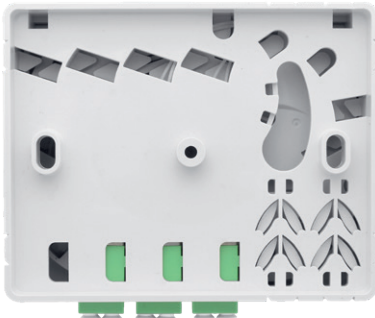

Bottom area

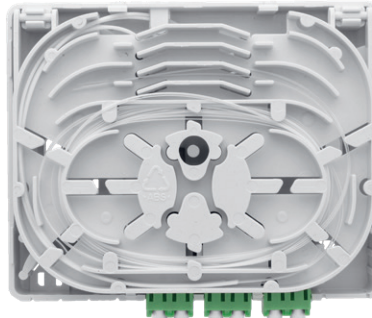

Splice area

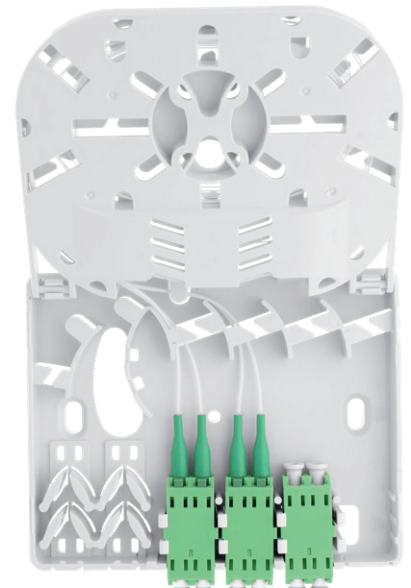

Patch area

	FTTH-WO-4F-empty	FTTH-WO-4F-SC/APC-P	FTTH-WO-4F-LC/APC-P	FTTH-WO-4F-pre-installed	FTTH-WO-4F-SC/APC	FTTH-WO-4F-LC/APC
Application	-	Splice/Patch	Splice/Patch	Patch	Splice/Patch	Splice/Patch
Interface	-	4 x SC/APC-simplex adapters & pigtails	2 x LC/APC-duplex adapters & pigtails	4 x SC/APC-simplex or 2 x LC/APC-duplex	4 x SC/APC-simplex adapters	2 x LC/APC-duplex adapters
Dimensions (L x W x D) [mm]	100 x 80 x 29					
Mounting options	Central wall installation with mounting hole spacing 78 mm, additional central hole					
Material	Plastic material ABS					
Color	Pure white RAL 9010					
Cable feed	Bottom area: 2 times from all sides, patch area: 2 times from the bottom-left hand side with cable feed to clamp					
Insertion loss IL [dB max.]	-	-	0,25	-	-	-
Return loss RL [dB min.]	-	-	60	-	-	-
Safety	-	Adapter with spring-loaded protection hood for dust and laser protection				
Special features	Can be configured to your needs	-	-	In-house cable using G.657 fiber at various cable lengths	-	-