

WAVEPACE®

Splice patch wallbox XL


MDU – for 144 splices and 72 ports



- > FTTH wall box for indoor and outdoor application
- > To be used for network level 3 indoor-termination and in-house distribution
- > Robust and compact design
- > 2-part modular design, consisting of housing with foldable cover and removable fiber module including cable feed and clamp
- > Accommodates up to 18 LC quad or SC duplex adapters; a patch frame for 48 SC simplex adapters is available optionally
- > Very high splicing capacity with 144 fibers in 2 splice blocks, each with 6 splice trays
- > Crimp splice trays with integrated splice holder; heat shrink version available upon request
- > Fiber module with cable management at the hinged patch area and underneath for fiber routing, for splicing and loop function
- > Handling separation through parallel construction for e.g. network level 3 and 4 termination through practical fiber and cable routing
- > Locking system

Accessories

Item	Description
Adapter LC/APC Duplex	Duplex adapter LC/APC with ceramic sleeve, flangeless
Adapter LC/APC Quad	Quad adapter LC/APC with ceramic sleeve, flangeless
Adapter SC/APC	Simplex adapter SC/APC with ceramic sleeve, flangeless
Pigtail set LC/APC 12	Pigtail set with 12 fibers LC/APC, SM at G.657.A1 fiber, length 2 m, DIN (IEC60304) color coding, 900 µm
Pigtail set SC/APC 12	Pigtail set with 12 fibers SC/APC, SM at G.657.A1 fiber, length 2 m, DIN (IEC60304) color coding, 900 µm
Splice tray kit HS-12F	Kit, containing 6 splice trays with holder for heat-shrink splice protection for 12 fibers each

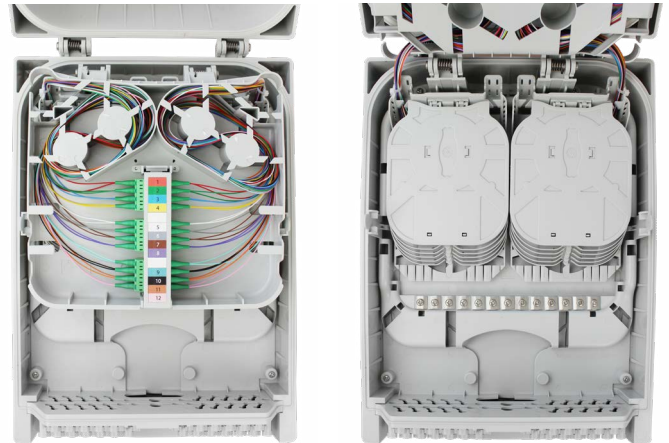

	MDU-XL-Wallbox-SP-72-Crimp-empty	MDU-XL-Wallbox-SP-72-HS-empty	MDU-XL-Wallbox-SP-72-LC/APC-72-Crimp	MDU-XL-Wallbox-SP-72-SC/APC-48-Crimp	MDU-XL-Wallbox-SP-72-SC/APC-48-HS
Splice protection holder	Crimp	Heat shrink	Crimp	Crimp	Heat shrink
Design	Empty		Pre-installed with 72 LC/APC ports & 72 pigtails	Pre-installed with 48 SC/APC ports and 48 pigtails	
Capacity	72 ports LC (36 SC) / 144 splices		18 quad adapters LC/APC & 144 splices	48 simplex adapters SC/APC & 144 splices	
Feed and outlet options	2 x (24 x 7 mm) & 2 x 14 mm, with loop functionality				
Cable feed	Bottom with innovative cable/tube interception				
Connector quality	-			Grade B	
Fiber type	-			G.657.A1	
Dimensions (H x W x D) [mm]	360 x 260 x 133				
Protection class	IP 56 / IK 10				
Color	Gray				

* Available with a patch frame for 48 SC simplex adapters on request

Subject to technical changes. Version 1.1



The entire WAVEPACE® product range and a list of sales partners is available at www.wavepace.com

Do you have any questions about WAVEPACE® products? Please send us an email to info@wavepace.com